RollFix Premium Electric – professional large-format projection

- Maintenance-free, silent operation thanks to robust tube motor (230 V)
- Supplied with flush-mount switch and approx. 300 cm connecting cable (exit top right)
- Soundproofed by a foam liner inside the casing
- Safety thanks to automatic shutdown
- Projection surface infinitely adjustable
- Can be wall or ceiling mounted; universal mounting angles are part of the delivery standard
- Suitable for installation in suspended ceilings with accessories

- **NEW: FM = flexible mounting angles for direct on-wall or on-ceiling mounting. Each angle has 55 cm of adjustment in ceiling-section slots allowing freedom for positioning on the casing. The angles can be set to suit the attachment points available in the room.**

- For integration into a suspended ceiling a functional, innovative installation housing or an installation frame for a clean ceiling finish (see page 107) are optionally available
- Screen surface sits exactly in the casing thanks to a conical weight bar, microswitch-controlled
- Square steel casing (1.5 mm), cross section 8 x 8 cm and 10 x 10 cm
- Casing colour: white, RAL 9003

Screen surface

- Front projection, **type D**
- DIN 19045 gain factor, approx. 1.2
- Matt white, woven fabric base
- Back: opaque

- Front projection, **type S**
- DIN 19045 gain factor, approx. 1.7
- MW Novalux, on a woven fabric base
- Back: opaque

Projection screens larger than 300 cm on request.
Ask your stockist.

RollFix Premium Electric				
Projection surface W/H	**Diagonal cm/inch**	**Casing W/H**	**Weight net kg**	**Code No.**
Type D				
180/180 cm	255/100	8/8 cm	19.7	132300
200/150 cm	250/98	8/8 cm	22.2	132310
200/200 cm	283/111	8/8 cm	22.2	132320
240/180 cm	300/118	8/8 cm	27.0	132330
240/240 cm	340/134	8/8 cm	27.0	132340
300/225 cm	375/148	10/10 cm	39.0	132350
300/300 cm	424/167	10/10 cm	39.0	132360
Type S				
240/180 cm	300/118	8/8 cm	27.0	132370
240/240 cm	340/134	8/8 cm	27.0	132380
300/225 cm	375/148	10/10 cm	39.0	132390
300/300 cm	424/167	10/10 cm	39.0	132400

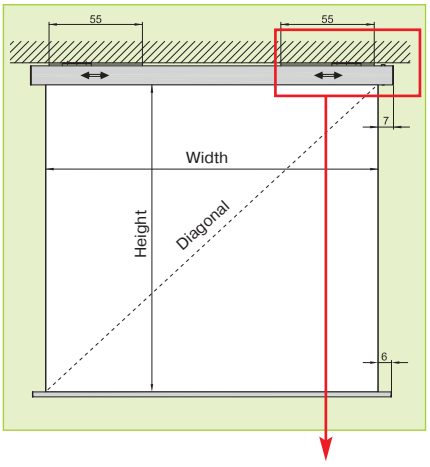

Installation on request

Flush-mount rotary switch (in delivery standard)



Conical weight bar for flush finish with casing

Wall spacer (see page 106)

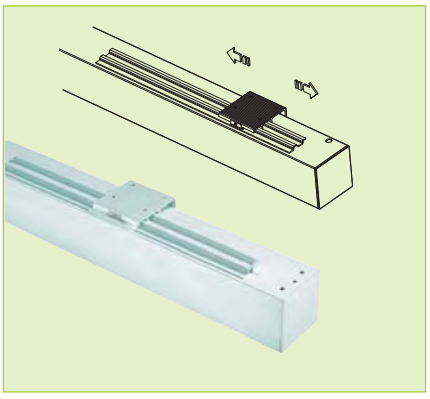

Flexible mounting angle

Accessories: see pages 106 and 107